

OEM719

Multi-Frequency, Backward Compatible GNSS Receiver Includes All Modern Signals

High Precision GNSS, Backward Compatible Size

The multi-frequency OEM719 offers future ready precise positioning for space constrained applications. Advanced interference mitigation features maintain high performance in challenging environments. Form factor and pin compatible with the popular OEM615 and OEM617 receivers from Hexagon | NovAtel, the OEM719 provides the most efficient way to bring powerful Global Navigation Satellite System (GNSS) capable products to market quickly. With centimeter level positioning utilizing TerraStar satellite-delivered correction services, the OEM719 ensures globally available, high performance positioning without the need for expensive network infrastructure. Anywhere. Anytime.


Built-In Flexibility

The OEM719 can be configured in multiple ways for maximum flexibility. OEM7 firmware from NovAtel provides users with the ability to configure the OEM719 for their unique application needs. The OEM719 is scalable to offer sub-meter to centimeter level positioning, and is field upgradeable to all OEM7 family software options. These options include ALIGN for precise heading and relative positioning, GLIDE for decimeter level pass-to-pass accuracy and SPAN GNSS+INS technology for continuous 3D position, velocity and attitude. RTK delivers centimeter level real-time positioning, or go base-free for centimeter and decimeter PPP solutions using TerraStar corrections.

To learn more about how our firmware solutions can enhance your positioning, visit novatel.com/products/firmware-options-pc-software/gnss-receiver-firmware-options.

Designed With The Future In Mind

The OEM719 is capable of tracking all current and upcoming GNSS constellations including GPS, GLONASS, Galileo, BeiDou, QZSS and NavIC. It is software upgradeable to track upcoming signals as they become available.

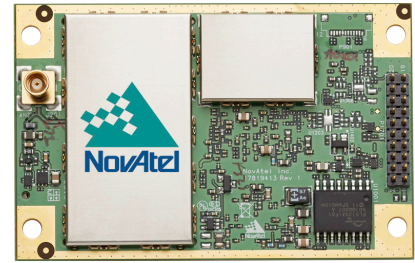

Features

- All-constellation, multi-frequency positioning solution
- TerraStar correction services supported over multi-channel L-Band and IP connections
- Advanced interference visualization and mitigation features
- RTK, GLIDE and STEADYLINE firmware options
- Simple to integrate, small form factor with 20 g vibration performance rating
- Compatible with existing OEM615 and OEM617 integrations
- SPAN GNSS+INS functionality

Performance¹**Signal Tracking**

GPS	L1 C/A, L1C, L2C, L2P, L5
GLONASS ²	L1 C/A, L2 C/A, L2P, L3, L5
Galileo ³	E1, E5 AltBOC, E5a, E5b, E6
BeiDou	B1I, B1C, B2I, B2a, B2b, B3I
QZSS	L1C/A, L1C, L2C, L5, L6
NavIC (IRNSS)	L5
SBAS	L1, L5
L-Band	up to 5 channels

Horizontal Position Accuracy (RMS)

Single Point L1	1.5 m
Single Point L1/L2	1.2 m
SBAS ⁴	60 cm
DGPS	40 cm
TerraStar-L ⁵	40 cm
TerraStar-C PRO ⁵	2.5 cm
TerraStar-X ⁵	2 cm
RTK	1 cm + 1 ppm
Initialization time	< 10 s
Initialization reliability	> 99.9%

Maximum Data Rate

Measurements	up to 100 Hz
Position	up to 100 Hz

Time to First Fix

Cold start ⁶	< 39 s (typ)
Hot start ⁷	< 20 s (typ)

Signal reacquisition

L1	< 0.5 s (typ)
L2	< 1.0 s (typ)

Time Accuracy⁸ 20 ns RMS**Velocity Accuracy**
< 0.03 m/s RMS**Velocity Limit⁹** 515 m/s**Physical and Electrical****Dimensions¹⁰** 46 x 71 x 11 mm**Weight** 31 g**Power**

Input voltage 3.3 VDC ±5%

Power Consumption¹¹

GPS L1	0.9 W (typ)
GPS/GLONASS L1/L2	1.3 W (typ)
All frequencies/All constellations with L-Band	1.8 W (typ)

Antenna Port Power Output

Output voltage	5 VDC ±5%
Maximum current	200 mA

Connectors

Main	20-pin dual row male header
Antenna Input	see <i>RF Connector Variants</i>

RF Connector Variants

OEM719	MCX female
OEM719A	MCX 90° female
OEM719B	MMBX female

Communication Ports

3 LVCMOS Serial	up to 460,800 bps
2 CAN Bus	1 Mbps
1 USB 2.0 (device)	FS

Environmental**Temperature**

Operating	-40°C to +85°C
Storage	-55°C to +95°C

Humidity 95% non-condensing**Vibration**

Random	MIL-STD-810G (CH1), Method 514.7 (Cat 24, 20 g RMS) ¹²
Sinusoidal	IEC 60068-2-6

Bump ISO 9022-31-06 (25 g)**Shock**

Operating	MIL-STD-810G (CH1), Method 516.7 (40 g)
Non-operating	MIL-STD-810G (CH1), Method 516.7 (75 g)-Survival

Acceleration

Operating	MIL-STD-810G (CH1), Method 513.7 (16 g)
-----------	---

Compliance

FCC, ISED, CE and Global Type Approvals

Features

- Field upgradeable software
- Differential GNSS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, 3.2, 3.3, 3.4, CMR, CMR+, RTCA and NOVATELX
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Receiver Autonomous Integrity Monitoring (RAIM)
- GLIDE and STEADYLINE smoothing algorithms
- Interference Toolkit
- Outputs to drive external LEDs
- 2 Event inputs
- 1 Event output
- Pulse Per Second (PPS) output

Firmware Solutions

- ALIGN
- SPAN GNSS+INS technology
- RTK
- RTK ASSIST
- TerraStar PPP
- API

Optional Accessories

- VEXXIS GNSS-500 and GNSS-800 series antennas
- Compact GNSS antennas
- Mechanical mounting rails
- OEM7 Development Kit

1. Typical values. Performance specifications subject to GNSS system characteristics, Signal-in-Space (SIS) operational degradation, ionospheric and tropospheric conditions, satellite geometry, baseline length, multipath effects and the presence of intentional or unintentional interference. 2. Hardware ready for L3 and L5. 3. E1bc and E6bc support only. 4. GPS-only. 5. Requires a subscription to a TerraStar data service. Subscriptions available from NovAtel. 6. Typical value. No almanac or ephemerides and no approximate position or time. 7. Typical value. Almanac and recent ephemerides saved and approximate position and time entered. 8. Time accuracy does not include biases due to RF or antenna delay. 9. Export licensing restricts operation to a maximum of 515 meters per second, message output impacted above 500 m/s. 10. On the OEM719A, the MCX connector extends an additional 2.06 mm (0.081") from the board (71 mm dimension). 11. Typical values using serial port communication without interference mitigation. Consult the OEM7 User Documentation for power supply considerations. 12. Requires mechanical mounting rails to meet 20g; 7.7 g without rails.

Contact Hexagon | NovAtel

sales.nov.ap@hexagon.com 1-800-NOVATEL (U.S. and Canada) or 403-295-4900 | China: 0086-21-68882300 | Europe: 44-1993-848-736 | SE Asia and Australia: 61-400-883-601. For the most recent details of this product: novatel.com

ALIGN, GLIDE, NovAtel, OEM7, RTK ASSIST, SPAN, STEADYLINE, TerraStar and VEXXIS are trademarks of NovAtel, Inc., entities within the Hexagon Autonomy & Positioning division, their affiliated entities, and/or their licensors. All other trademarks are properties of their respective owners.

©2020 NovAtel Inc. All rights reserved. NovAtel is part of Hexagon. NovAtel makes no representation or warranty regarding the accuracy of the information in this publication. This document gives only a general description of the product(s) or service(s) offered by NovAtel, and, except where expressly provided otherwise, shall not form part of any contract. Such information, the products and conditions of supply are subject to change without notice.