

# OEM719

Multi-frequency, backward compatible GNSS receiver supports all modern signals

## High-precision GNSS, backward compatible

The multi-frequency OEM719 offers future-ready precise positioning for space-constrained applications. Advanced interference mitigation features maintain high performance in challenging environments. The OEM719 provides the most efficient way to bring powerful Global Navigation Satellite System (GNSS) capable products to market quickly. It is form factor and pin-compatible with the popular OEM615 and OEM617 receivers from Hexagon | NovAtel. With centimetre-level positioning utilising TerraStar satellite-delivered correction services, the OEM719 ensures globally available, high-performance positioning without the need for expensive network infrastructure. Anywhere. Anytime.


## Built-in flexibility

The OEM719 can be configured in multiple ways for maximum flexibility. OEM7 firmware from NovAtel allows users to configure the OEM719 for their unique application needs. The OEM719 is scalable to offer sub-metre to centimetre-level positioning and is field upgradeable to all OEM7 family software options. These options include ALIGN for precise heading and relative positioning, GLIDE for decimetre-level pass-to-pass accuracy, SPAN GNSS+INS technology for continuous 3D position, velocity and attitude, and GNSS Resilience and Integrity Technology (GRIT) for advanced positioning protection. RTK delivers centimetre-level real-time positioning, or it can go base-free for centimetre and decimetre PPP solutions using TerraStar corrections.

To learn more about how our firmware solutions can enhance your positioning, visit [novatel.com/products/firmware-options-pc-software/gnss-receiver-firmware-options](https://novatel.com/products/firmware-options-pc-software/gnss-receiver-firmware-options).

## Designed with the future in mind

The OEM719 can track all current and upcoming GNSS constellations including GPS, GLONASS, Galileo, BeiDou, QZSS and NavIC. It is software upgradeable to track modernised signals as they become available.

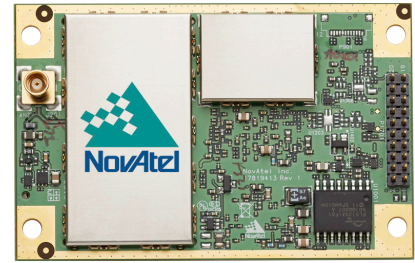

## Features

- High position availability with multi-constellation, multi-frequency tracking and high data rate
- TerraStar Correction Services supported over multi-channel L-Band and IP connections
- Spoofing detection, interference detection and mitigation provided by GRIT
- RTK, GLIDE and STEADYLINE firmware options
- Simple to integrate, small form factor with 20 g vibration performance rating
- Compatible with existing OEM615 and OEM617 integrations
- SPAN GNSS+INS technology integration bridges 3D positioning through GNSS outages in difficult environments

## Performance<sup>1</sup>

### Signal tracking

GPS	L1 C/A, L1C, L2C, L2P, L5
GLONASS <sup>2</sup>	L1 C/A, L2 C/A, L2P, L3, L5
Galileo <sup>3</sup>	E1, E5 AltBOC, E5a, E5b, E6
BeiDou	B1I, B1C, B2I, B2a, B2b, B3I
QZSS	L1 C/A, L1C, L1S, L2C, L5, L6
NavIC (IRNSS)	L5
SBAS	L1, L5
L-Band	up to 5 channels

### Horizontal position accuracy (RMS)

Single point L1	1.5 m
Single point L1/L2	1.2 m
SBAS <sup>4</sup>	60 cm
DGPS	40 cm
TerraStar-L <sup>5</sup>	40 cm
TerraStar-C PRO <sup>5</sup>	2 cm
TerraStar-X <sup>5</sup>	2 cm
RTK	1 cm + 1 ppm

### Maximum data rate

Measurements	up to 100 Hz
Position	up to 100 Hz

### Time to first fix<sup>6</sup>

Cold start	< 34 s (typ)
Hot start	< 20 s (typ)

### Signal reacquisition

L1	< 0.5 s (typ)
L2	< 1.0 s (typ)

### Time accuracy<sup>7</sup>

	< 5 ns RMS
--	------------

### Velocity accuracy

	< 0.03 m/s RMS
--	----------------

### Velocity limit<sup>8</sup>

	600 m/s
--	---------

## Physical and electrical

**Dimensions<sup>9</sup>** 46 x 71 x 11 mm

**Weight** 31 g

**Input voltage** 3.3 VDC ±5%

### Power consumption<sup>10</sup>

GPS L1	0.9 W (typ)
GPS/GLONASS L1/L2	1.3 W (typ)
All frequencies/All constellations with L-Band	1.8 W (typ)

### Antenna port power output

Output voltage	5 VDC ±5%
Maximum current	200 mA

### Connectors

Main	20-pin dual row male header
Antenna input	see <i>RF connector variants</i>

### RF connector variants

OEM719	MCX female
OEM719A	MCX 90° female
OEM719B	MMBX female

### Communication ports

3 LVCMOS serial	up to 460,800 bps
2 CAN Bus	1 Mbps
1 USB 2.0 (device)	FS

## Environmental

### Temperature

Operating	-40°C to +85°C
Storage	-55°C to +95°C

**Humidity** 95% non-condensing

### Vibration

Random <sup>11</sup>	MIL-STD-810G (CH1), Method 514.7 (Cat 24, 20 g RMS)
Sinusoidal	IEC 60068-2-6

**Bump** ISO 9022-31-06 (25 g)

### Shock

Operating	MIL-STD-810G (CH1), Method 516.7 (40 g)
Non-operating	MIL-STD-810G (CH1), Method 516.7 (75 g)-Survival

### Acceleration

Operating	MIL-STD-810G (CH1), Method 513.7 (16 g)
-----------	--

## Compliance

FCC, ISED, CE and Global Type Approvals

## Features

- Field upgradeable software
- Differential GNSS positioning
- Differential correction support for RTCM 2.1, 2.3, 3.0, 3.1, 3.2, 3.3, CMR, CMR+, RTCA and NOVATELX
- Navigation output support for NMEA 0183 and detailed NovAtel ASCII and binary logs
- Receiver Autonomous Integrity Monitoring (RAIM)
- GLIDE and STEADYLINE smoothing algorithms
- Outputs to drive external LEDs
- 2 Event inputs
- 1 Event output
- Pulse Per Second (PPS) output

## Optional accessories

- Mechanical mounting rails
- OEM7 Development Kit

1. Typical values under ideal, open sky conditions.

2. Hardware ready for L5.

3. E1bc and E6bc support only.

4. GPS-only.

5. Requires a subscription to TerraStar correction service.

6. Cold start: no almanac or ephemerides and no approximate position or time.

Hot start: almanac and recent ephemerides saved and approximate position and time entered.

7. Time accuracy does not include biases due to RF or antenna delay.

8. Export licensing restricts operation to a maximum of 600 m/s, message output impacted above 585 m/s.

9. On the OEM719A, the MCX connector extends an additional 2.06 mm (0.081") from the board (71 mm dimension).

10. Typical values using serial port communication without interference mitigation. Consult the OEM7 User Documentation for power supply considerations

11. Requires mechanical mounting rails to meet 20g; 7.7 g without rails.

# Contact Hexagon | NovAtel

sales.nov.ap@hexagon.com 1-800-NOVATEL (U.S. and Canada) or 403-295-4900 | China: 0086-21-68882300 | Europe: 44-1993-848-736 | SE Asia and Australia: 61-400-883-601. For the most recent details of this product: novatel.com

This document and the information contained herein are provided AS IS and without any representation or warranty of any kind. All warranties, express or implied, are hereby disclaimed, including but not limited to any warranties of merchantability, non-infringement, and fitness for a particular purpose. Nothing herein constitutes a binding obligation. The information contained herein is subject to change without notice.

ALIGN, GLIDE, NovAtel, OEM7, SPAN, STEADYLINE and TerraStar are trademarks of Hexagon AB and/or its subsidiaries and affiliates, and/or their licensors. All other trademarks are properties of their respective owners.

© Copyright 2016 – 2023 Hexagon AB and/or its subsidiaries and affiliates. All rights reserved. A list of entities within the Hexagon Autonomy & Positioning division is available at

<https://hexagon.com/company/divisions/autonomy-and-positioning>.

D21049 Version 9 | 27 July 2023 | Printed in Canada